



TIF™100-15-16S Series thermally conductive interface materials are applied to fill the air gaps between the heating elements and the heat dissipation fins or the metal base. Their flexibility and elasticity make them suited to the coating of the very uneven surfaces. Heat can transmit to the metal housing or dissipation plate from the separate elements or even the entire PCB, which in effect enhances the efficiency and life-time of the heat-generating electronic components.

Features

- » Good thermal conductive: **1.5 W/mK**
- » Naturally tacky needing no further adhesive coating
- » Soft and Compressible for low stress applications
- » Available in varies thickness


Application

- » Cooling components to the chassis of frame
- » Car Battery & Power Supply
- » Charging Pile
- » Graphics Card Thermal Module
- » Set Top Box
- » LED

Typical Properties of TIF100-15-16S Series

Color	Violet	Visual	Dielectric Breakdown Voltage (T= 1mm above)	>5500 VAC	ASTM D149
Construction	Ceramic filled silicone elastomer	*****	Dielectric Constant	5.5 MHz	ASTM D150
Thermal Conductivity	1.5 W/mK	ASTM D5470	Volume Resistivity	3.3X10 ¹³ Ohm-meter	ASTM D257
Hardness	45 Shore 00	ASTM 2240	Continuous Use Temp	- 40 To 160 °C	*****
Specific Gravity	2.31 g/cc	ASTM D297	Outgassing (TML)	0.30%	ASTM E595
Thickness range	0.010"-0.200" (0.25mm-5.0mm)	ASTM D374	Flame Rating	94 V0	UL E331100

Product Identification:

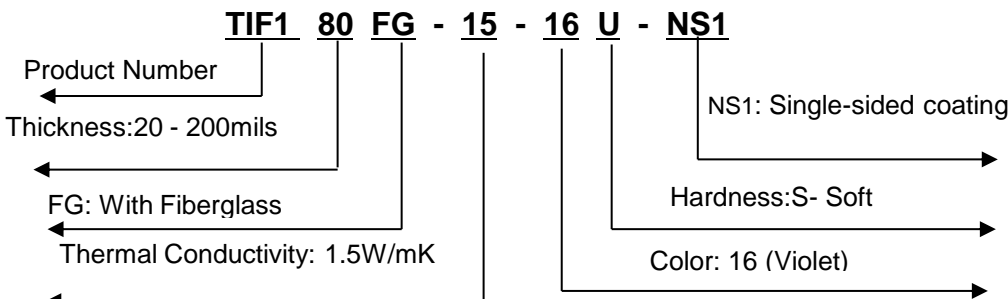

Standard Thicknesses

0.010-inch to 0.200-inch (0.25mm to 5.0mm) Individual die cut shapes and custom thickness can be supplied.

Options

Proprietary NS1 option available to eliminate tack from one side to aid in handling.

If you want to know our thermal Products, you can visit our website . <http://www.ziitek.com>



Gap Fillers | Pouring sealant | Silicon tape | Thermally Conductive paste | Flake graphite | Thermally Conductive Insulators | Ceramic heat sinks | Thermally Conductive plastic | Thermally Conductive Adhesive Tapes

Canada: Tel: +001-604-2998559 E-mail: sales@thermazig.com	Taiwan: Tel: +886-2-22771007 Fax: +886-2-22771075 E-mail: frances@ziitek.com.tw	Dongguan: Tel: +86-769-38801208 Fax: +86-769-83791290 E-mail: angus@ziitek.com	Kunshan: Tel: +86-512-57816297 Fax: +86-512-57816327 E-mail: kelvin@ziitek.com	Hangzhou: Tel: +86-0571-63850366 Fax: +86-0571-63850322 E-mail: alex@ziitek.com
------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------

The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein.